

FIG.1

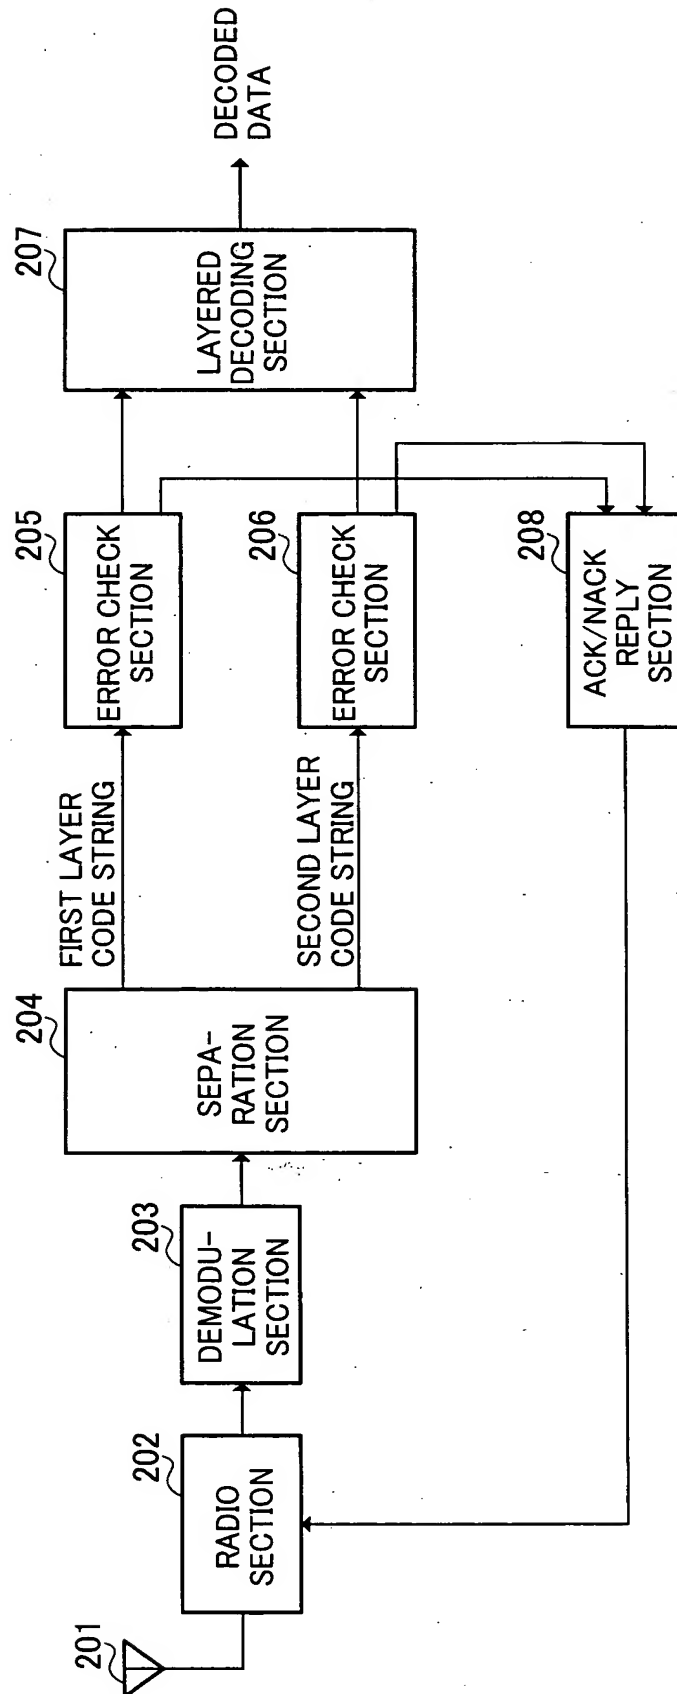
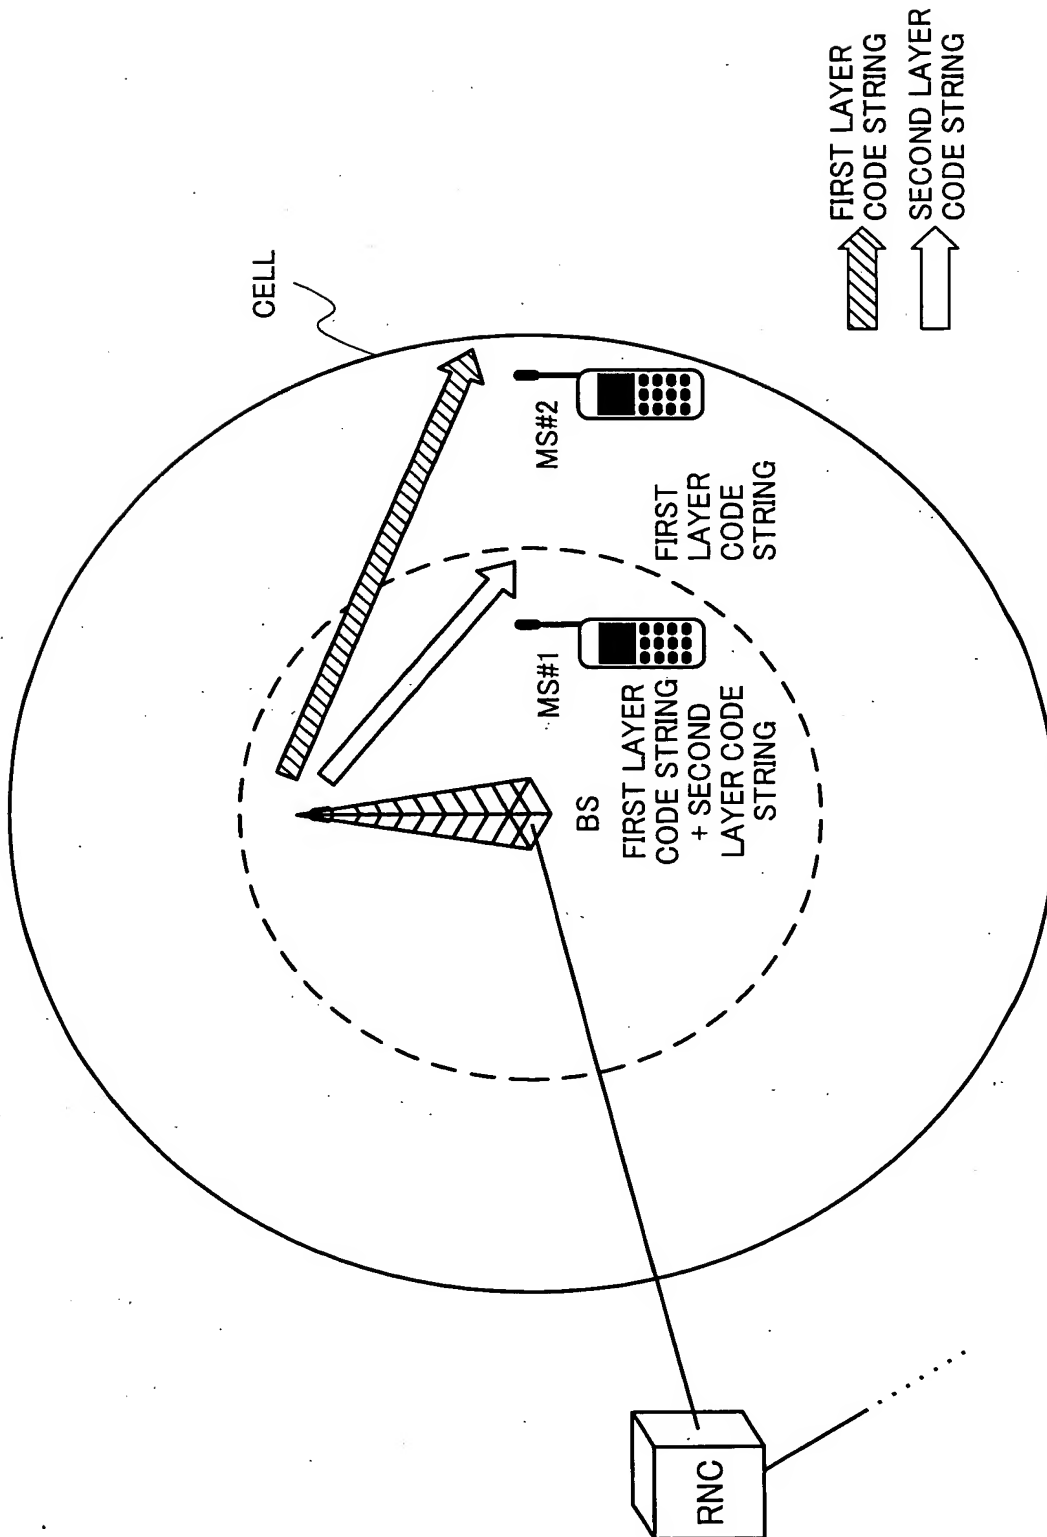


FIG. 2



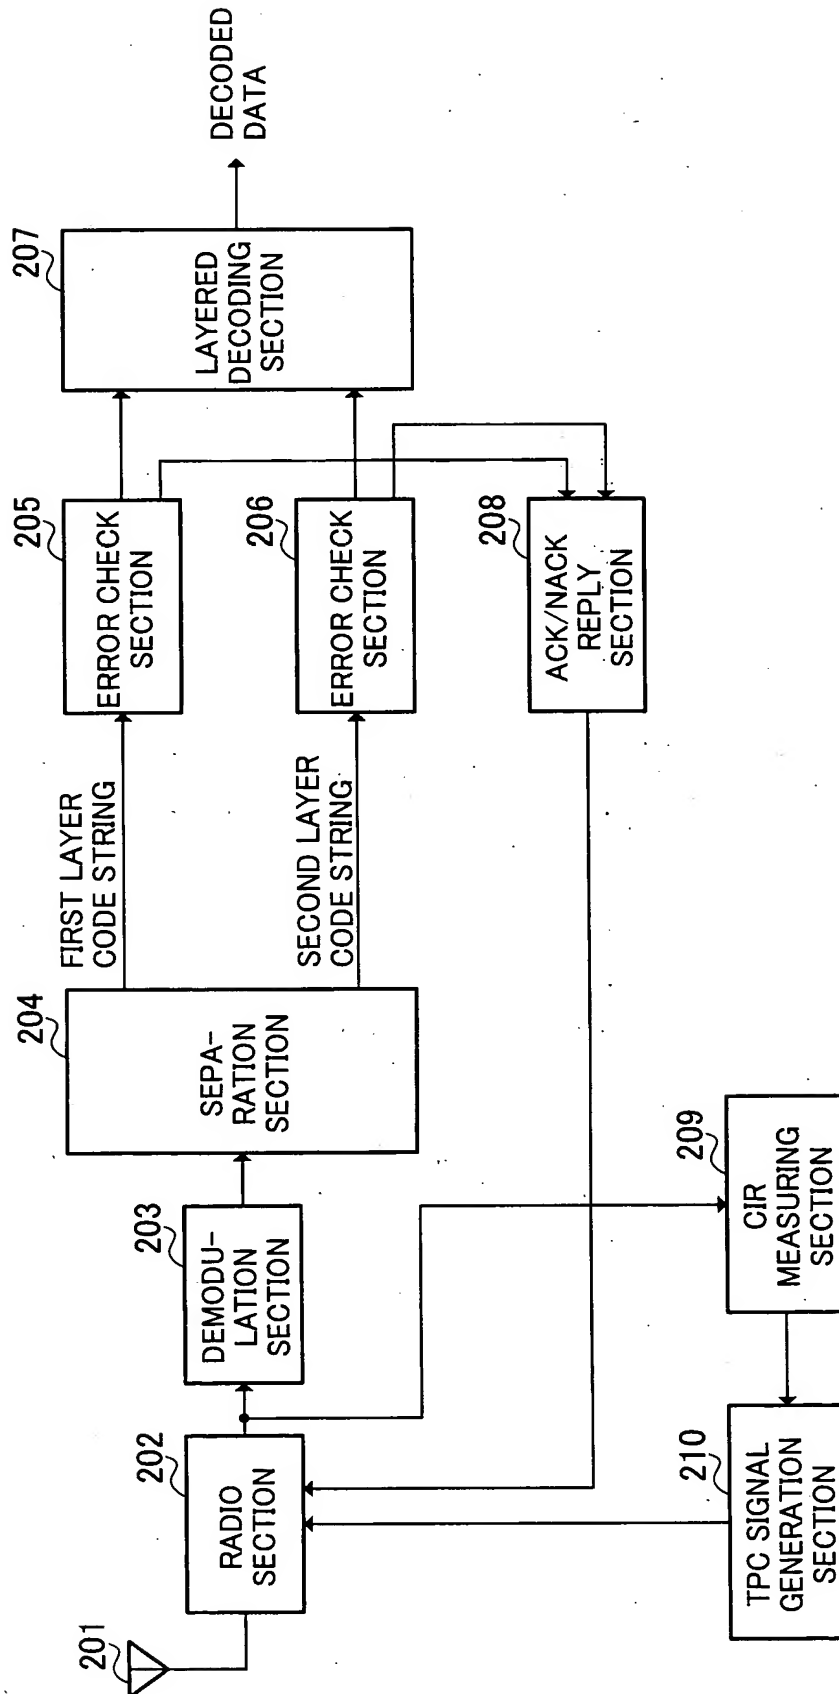


FIG. 4

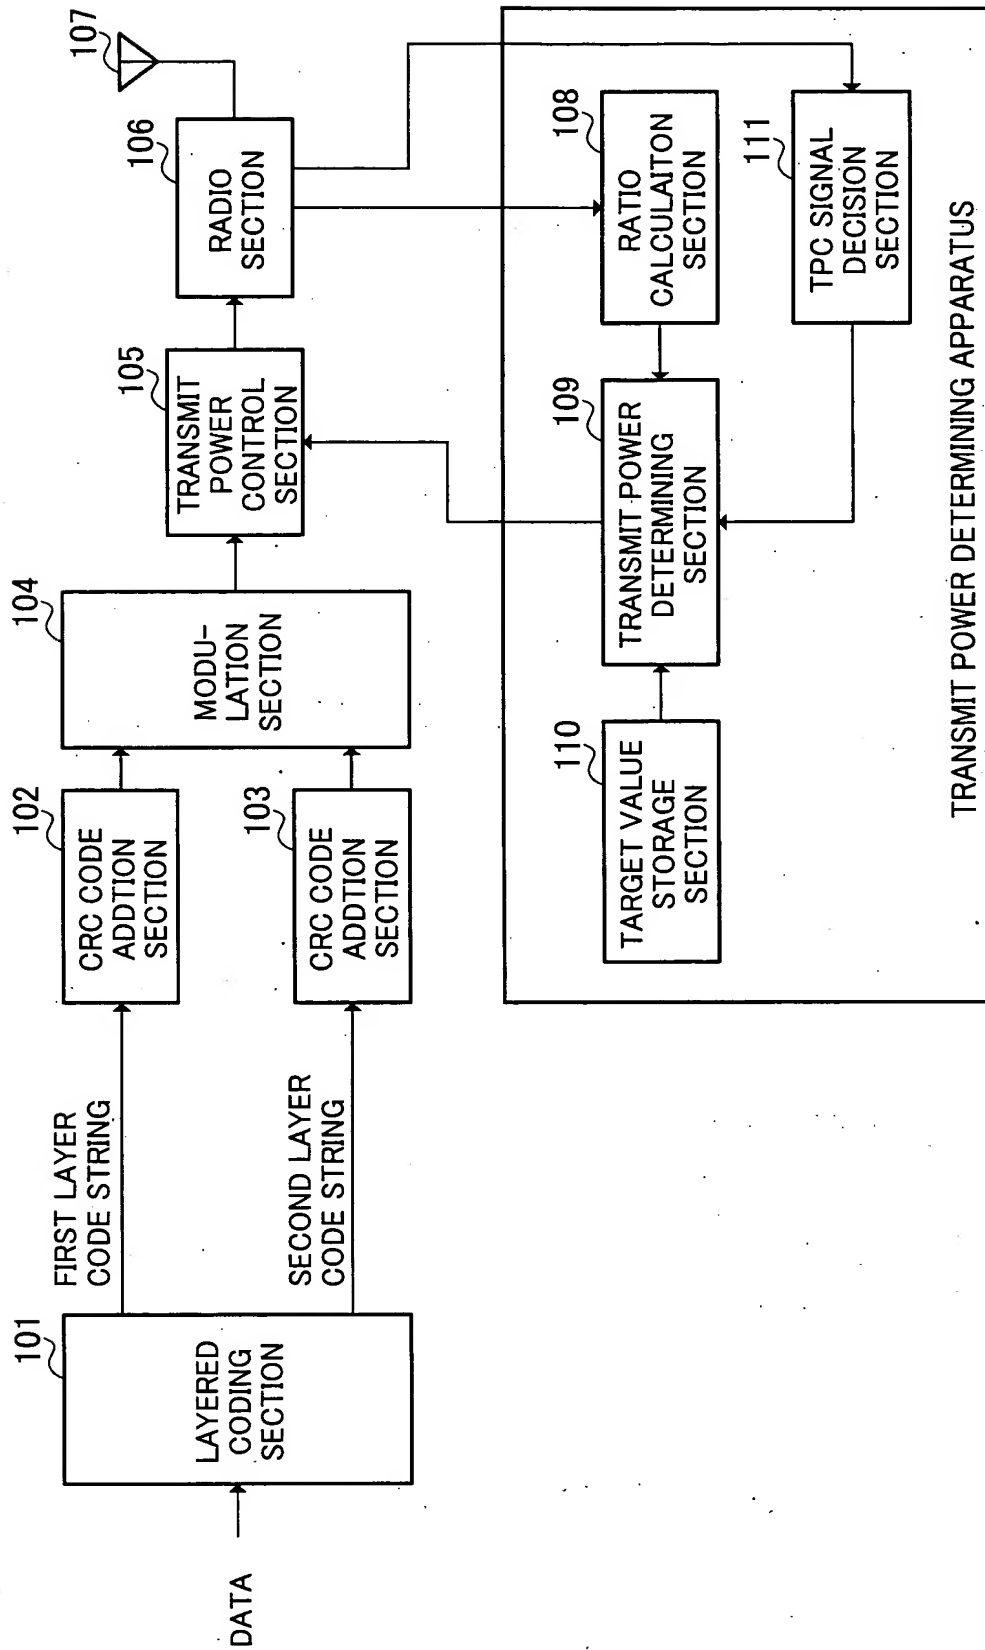


FIG.5

6/10

| TPC SIGNAL DECISION RESULT | RATIO OF HIGH QUALITY MOBILE STATIONS | |
|----------------------------------|---|--|
| | LESS THAN TARGET VALUE | EQUAL TO OR HIGHER THAN TARGET VALUE |
| INCREASED | INCREASED | INCREASED |
| DECREASED | INCREASED | DECREASED |

FIG.6

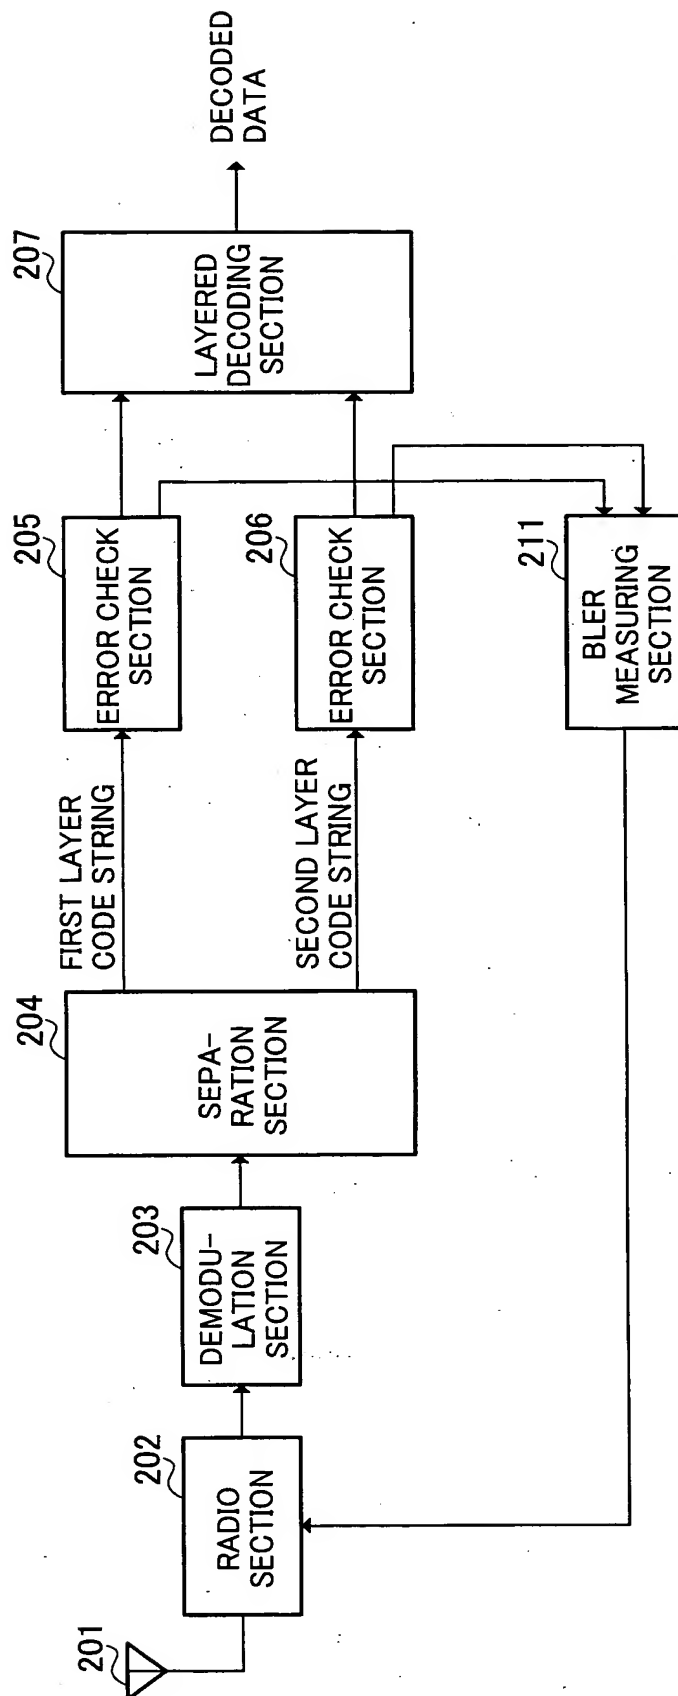


FIG. 7

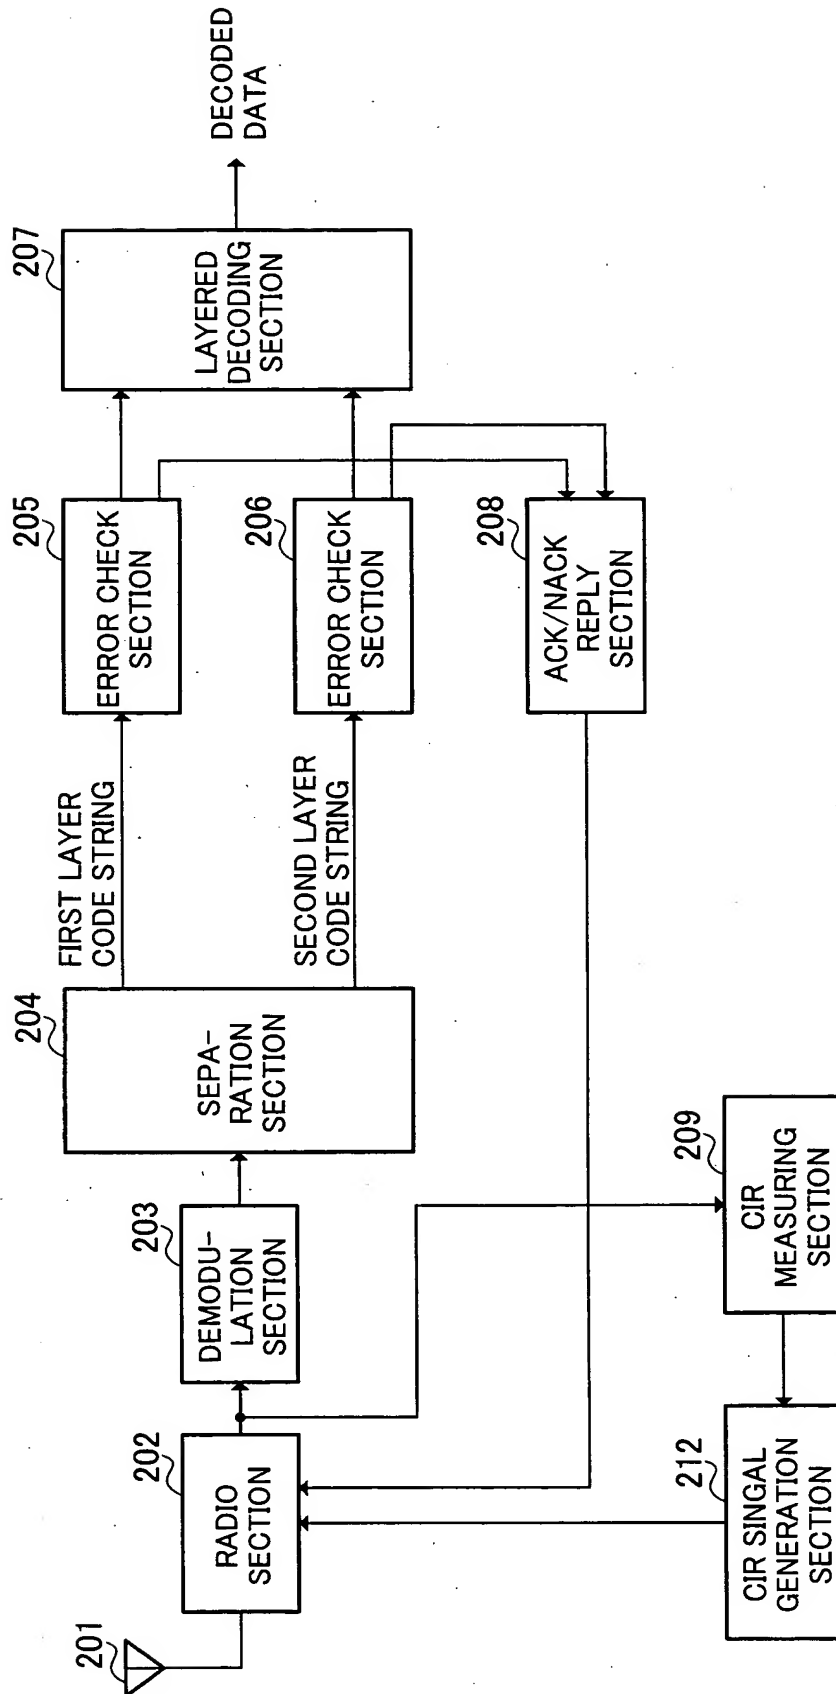


FIG.8

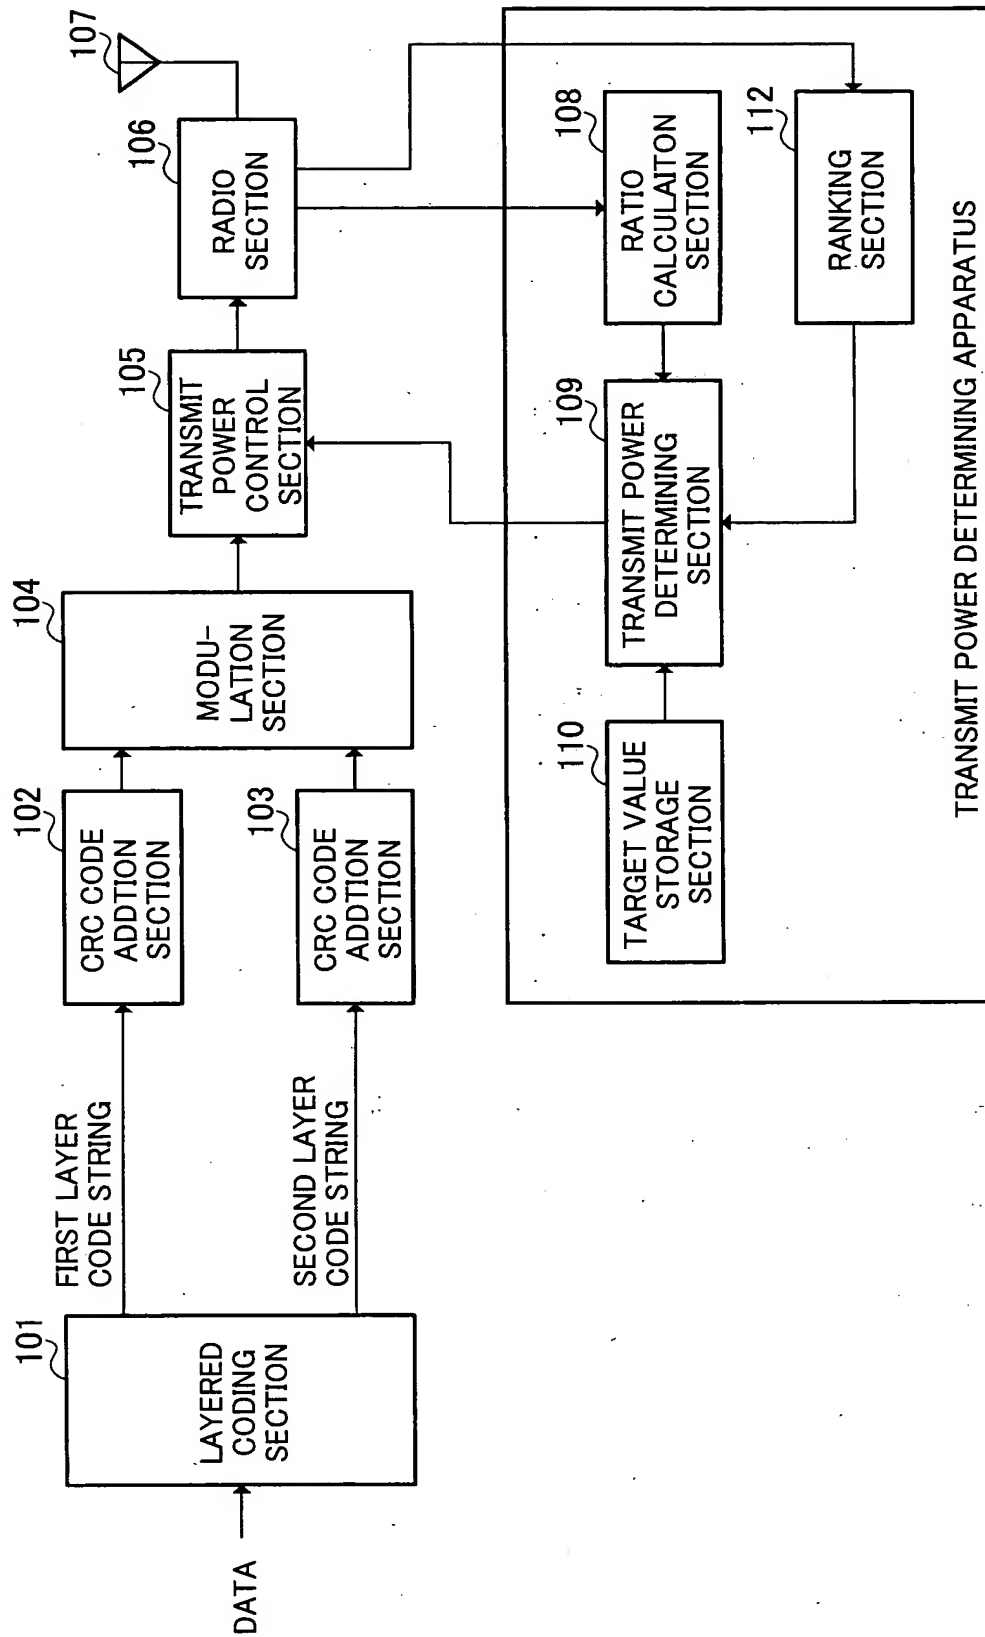


FIG. 9

10/10

| RANKING | MOBILE STATION | CIR [dB] | ACK/NACK SIGNAL OF SECOND LAYER CODE STRING |
|---------|----------------|----------|---|
| 1 | #3 | 10 | ACK |
| 2 | #7 | 8 | ACK |
| 3 | #4 | 7 | ACK |
| 4 | #1 | 6 | NACK |
| 5 | #6 | 3 | NACK |
| 6 | #2 | 2 | NACK |
| 7 | #8 | 1 | NACK |
| 8 | #5 | 0 | NACK |

FIG.10